



Common Cone Exhaust Fan


Features:

- 1) Reasonable cone designed with big air volume, low noise, low cost.
- 2) Blades: 6 pieces of mirror finished stainless steel blades, attractive and durable with big air volume, low noise, no distortion, no broken.
- 3) Shutter: made of high quality galvanized steel, antioxidant, light weight, no distortion, and flexible operation.
- 4) Frame: made of galvanized steel sheet, one-off molded, anti-corrosive and durable.
- 5) Belt pulley: made of aluminum magnesium alloy, light weight, high strength and good toughness.
- 6) Bearing: imported double-row bearing, super mute, high intension and durable.
- 7) Motor: high efficient and energy-saving motor with CCC certificate. Protection class: IP55, Insulation class: F.

Parameters:

Model specifications	Diameter blades- mm	Blades rotational speed- rpm	Motor rotational speed- rpm	Air flow m3/h	Total Pressure- Pa	Noise decibels	Import power - W	Rated voltage- V	High mm	Width mm	Thick mm
EOF(b)-900	750	630	1400	22000	65	≤65	550	380	900	900	1050
EOF(b)-1100	1000	600	1400	32500	70	≤70	750	380	1100	1100	1280
EOF(b)-1220	1100	460	1400	38000	73	≤70	750	380	1220	1220	1280
EOF(b)-1380	1250	439	1400	44000	80	≤70	1100	380	1380	1380	1480

Air Curves:

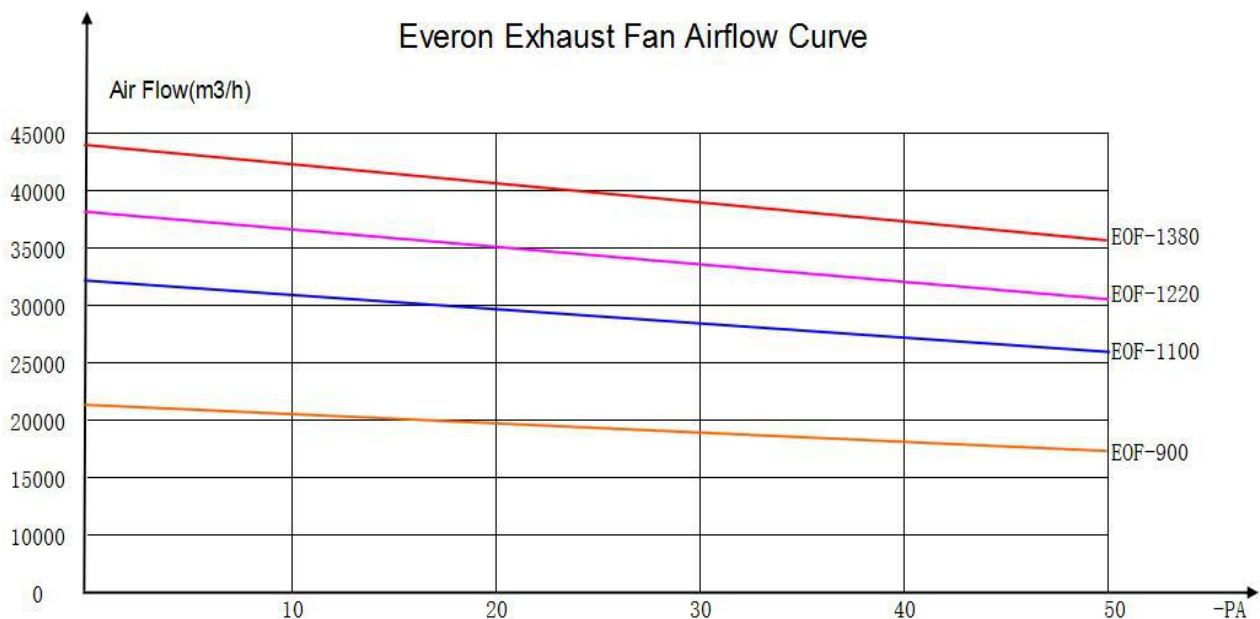




Frame: 1.0mm thickness, 180g/m2 Galvanized

Shutter: 0.45mm thickness, 180g/m2 Galvanized

Cone: 1.0mm thickness, 180g/m2 Galvanized

This is common cone exhaust fan, with drop hammer type shutter open device. Price is more economical than the butterfly type.

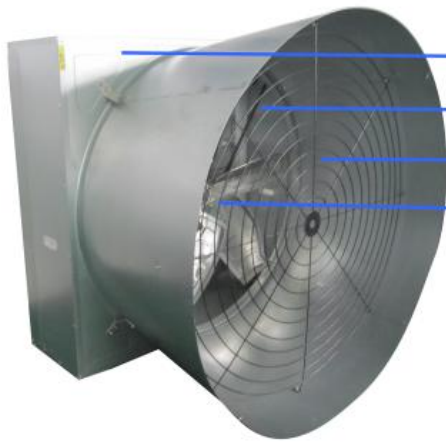

Motor: Simens/ABB/Laoyite/Nosch

Belt: Sanlux/Dongil/Mistuboshi are available

Mesh: Galvanized&Plastic Sprayed

Blade: 430 Stainless Steel, 1.2mm thickness

